

General Description

The MY70P03NE5 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 4.5V. This device is suitable for use as a Battery protection or in other Switching application.





Features

V_{DSS}	-30	V
I_D	-70	A
$R_{DS(ON)}$ (at $V_{GS} = 10V$)	6	m Ω
$R_{DS(ON)}$ (at $V_{GS} = 4.5V$)	9.5	m Ω

Application

- Battery protection
- Load switch
- Uninterruptible power supply



Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
MY70P03NE5	PDFN5*6-8L	007DPD	5000

Absolute Maximum Ratings ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-30	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D@T_C=25^{\circ}\text{C}$	Continuous Drain Current, $V_{GS} @ -10V^{1,6}$	-70	A
$I_D@T_C=100^{\circ}\text{C}$	Continuous Drain Current, $V_{GS} @ -10V^{1,6}$	-50	A
I_{DM}	Pulsed Drain Current ²	-200	A
EAS	Single Pulse Avalanche Energy ³	80	mJ
I_{AS}	Avalanche Current	-40	A
$P_D@T_C=25^{\circ}\text{C}$	Total Power Dissipation ⁴	90	W
T_{STG}	Storage Temperature Range	-55 to 175	$^{\circ}\text{C}$
T_J	Operating Junction Temperature Range	-55 to 175	$^{\circ}\text{C}$
$R_{\theta JA}$	Thermal Resistance Junction-ambient ¹ ($t \leq 10S$)	20	$^{\circ}\text{C/W}$
	Thermal Resistance Junction-ambient ¹ (Steady State)	50	$^{\circ}\text{C/W}$
$R_{\theta JC}$	Thermal Resistance Junction-case ¹	1.6	$^{\circ}\text{C/W}$

Electrical Characteristics (T_J=25 °C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =-250uA	-30	---	---	V
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V _{GS} =-10V , I _D =-20A	---	6	7.2	mΩ
		V _{GS} =-4.5V , I _D =-15A	---	9.5	12	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =-250uA	-1.2	---	-2.5	V
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-24V , V _{GS} =0V , T _J =25 °C	---	---	-1	uA
		V _{DS} =-24V , V _{GS} =0V , T _J =55°C	---	---	-5	
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±20V , V _{DS} =0V	---	---	±100	nA
R _g	Gate Resistance	V _{DS} =0V , V _{GS} =0V , f=1MHz	---	1.2	---	Ω
Q _g	Total Gate Charge (-10V)	V _{DS} =-15V , V _{GS} =-10V I _D =-18A	---	60	---	nC
Q _{gs}	Gate-Source Charge		---	9	---	
Q _{gd}	Gate-Drain Charge		---	15	---	
T _{d(on)}	Turn-On Delay Time	V _{DD} =-15V V _{GS} =-10V R _G =3.3 Ω , I _D =-20A	---	17	---	ns
T _r	Rise Time		---	40	---	
T _{d(off)}	Turn-Off Delay Time		---	55	---	
T _f	Fall Time		---	13	---	
C _{iss}	Input Capacitance	V _{DS} =-25V , V _{GS} =0V , f=1MHz	---	3450	---	pF
C _{oss}	Output Capacitance		---	255	---	
C _{rss}	Reverse Transfer Capacitance		---	140	---	
I _S	Continuous Source Current ^{1,5}	V _G =V _D =0V , Force Current	---	---	-70	A
V _{SD}	Diode Forward Voltage ²	V _{GS} =0V , I _S =-1A , T _J =25°C	---	---	-1.2	V
t _{rr}	Reverse Recovery Time	I _F =-20A , di/dt=100A/μs , T _J =25°C	---	22	---	nS
Q _{rr}	Reverse Recovery Charge		---	72	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 20Z copper.
- 2.The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%
- 3.The EAS data shows Max. rating . The test condition is V_{DD}=-50V,V_{GS}=-10V,L=0.1mH,I_{AS}=-40A
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation
- 6.The maximum current rating is package limited.

Typical Characteristics

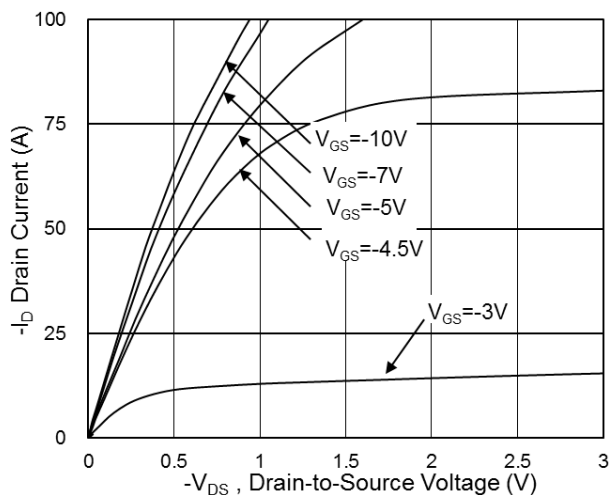


Fig.1 Typical Output Characteristics

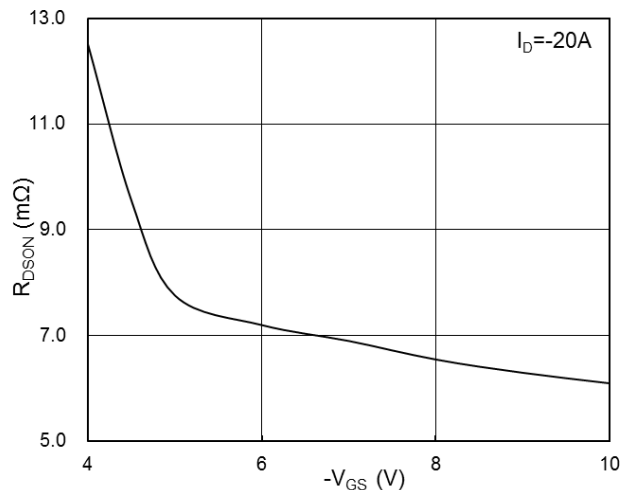


Fig.2 On-Resistance vs. Gate-Source Voltage

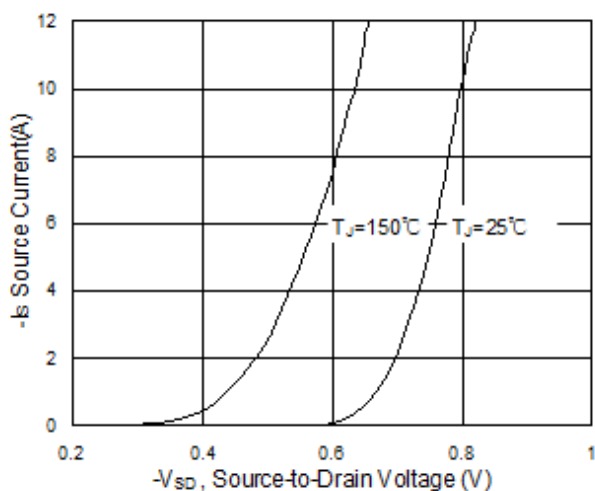


Fig.3 Forward Characteristics of Reverse

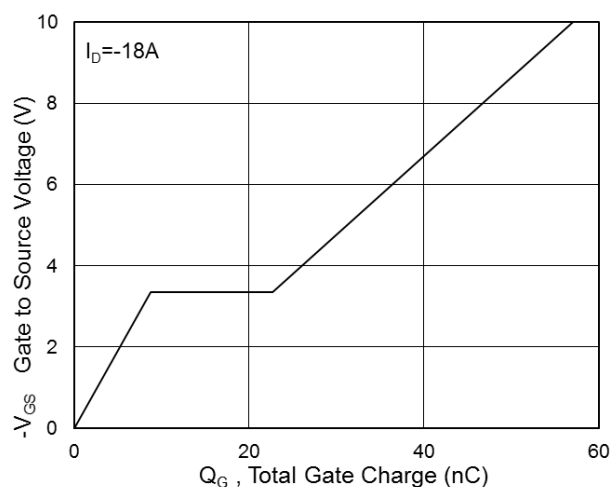


Fig.4 Gate-Charge Characteristics

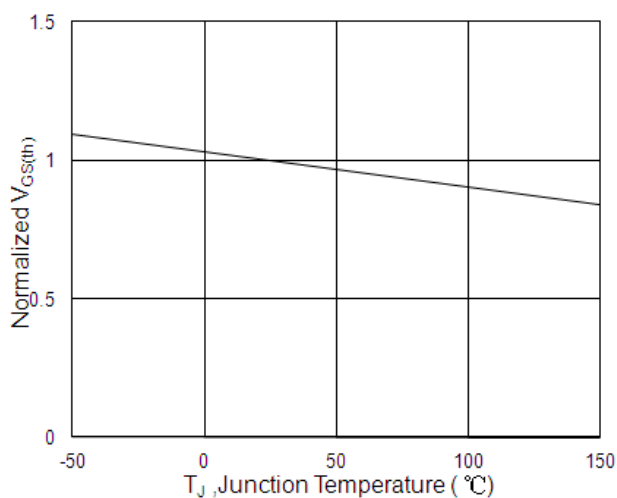


Fig.5 Normalized $-V_{GS(th)}$ vs. T_J

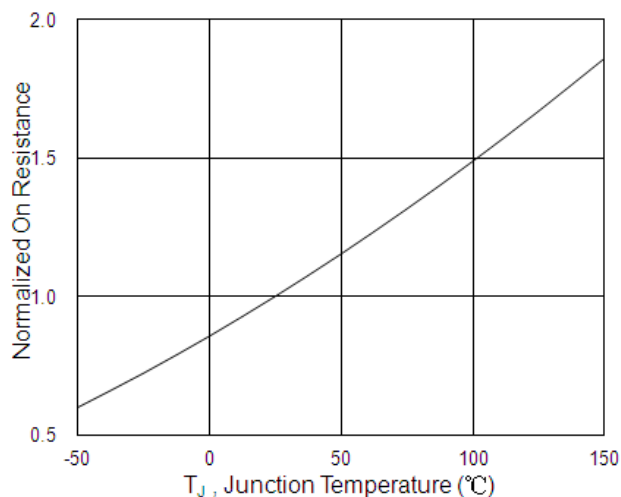


Fig.6 Normalized $R_{DS(on)}$ vs. T_J

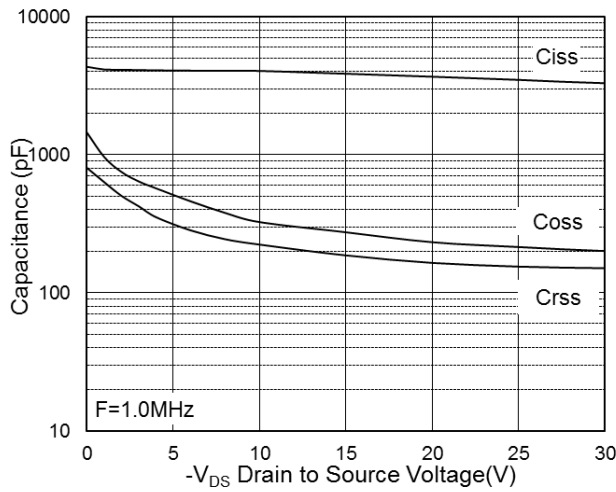


Fig.7 Capacitance

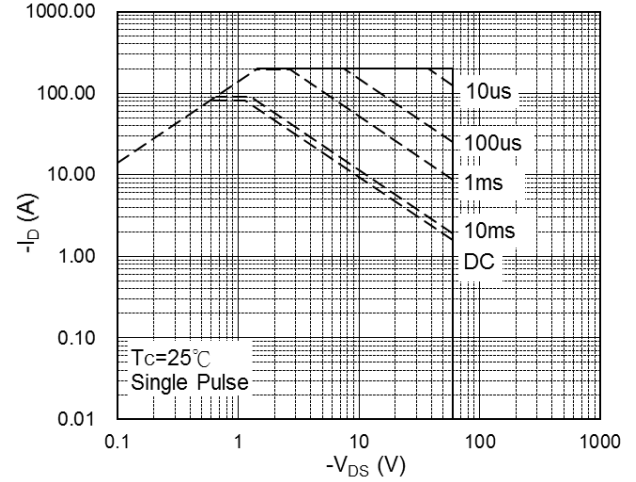


Fig.8 Safe Operating Area

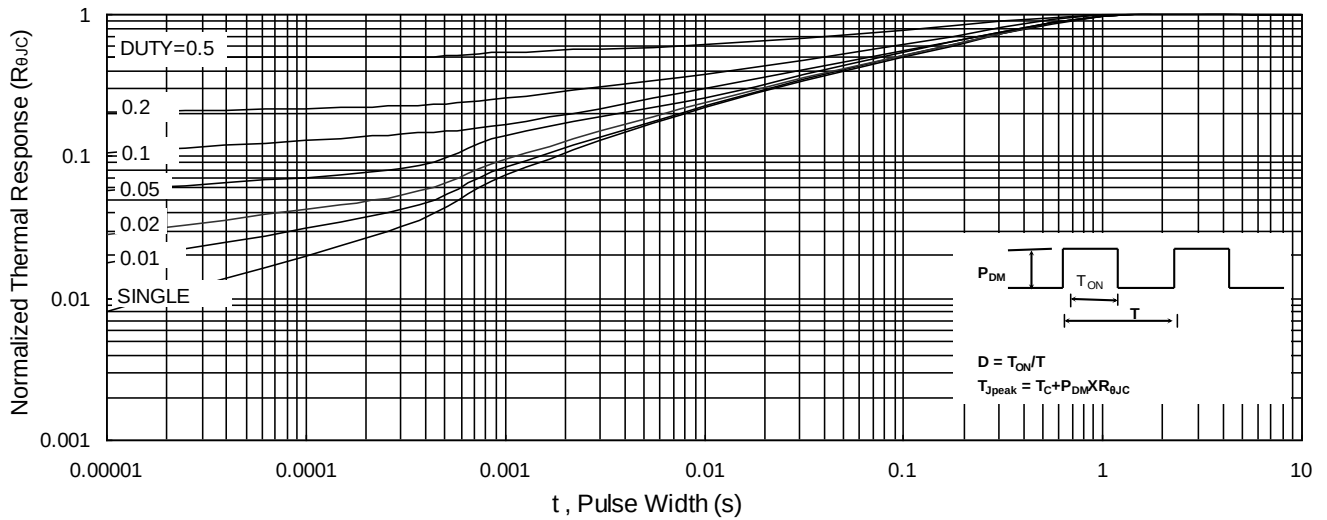


Fig.9 Normalized Maximum Transient Thermal Impedance

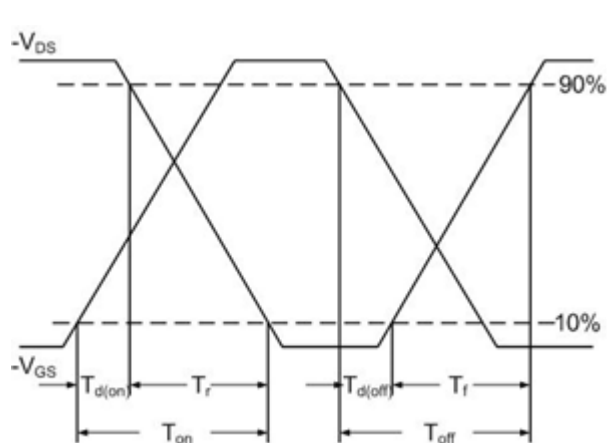


Fig.10 Switching Time Waveform


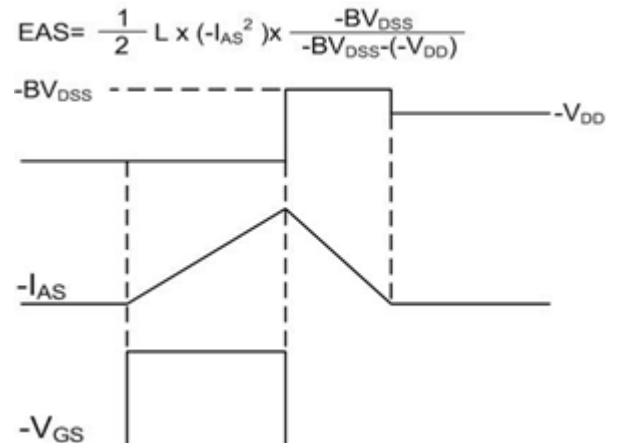


Fig.11 Unclamped Inductive Switching Waveform

Package Mechanical Data-DFN5*6-8L-JQ Single

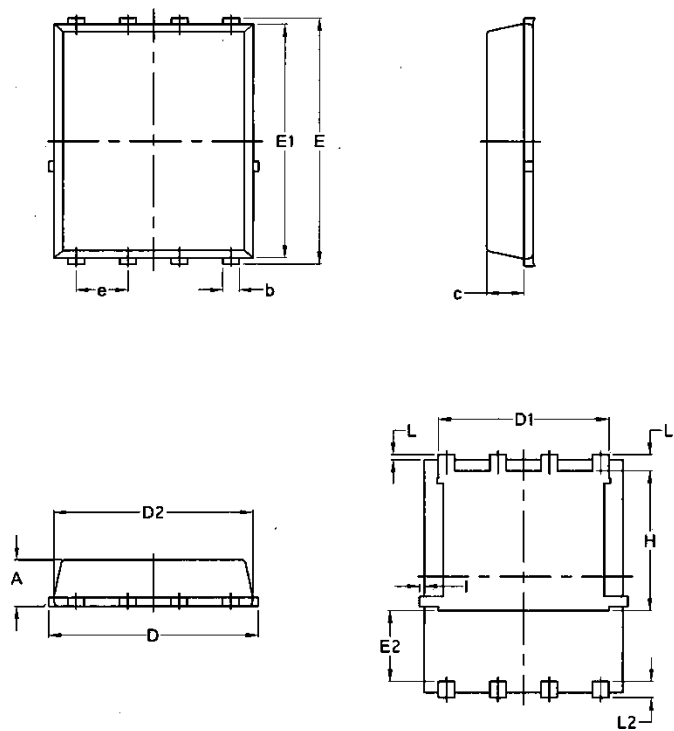

Symbol	Common			
	mm		Inch	
	Mim	Max	Min	Max
A	1.03	1.17	0.0406	0.0461
b	0.34	0.48	0.0134	0.0189
c	0.824	0.0970	0.0324	0.082
D	4.80	5.40	0.1890	0.2126
D1	4.11	4.31	0.1618	0.1697
D2	4.80	5.00	0.1890	0.1969
E	5.95	6.15	0.2343	0.2421
E1	5.65	5.85	0.2224	0.2303
E2	1.60	/	0.0630	/
e	1.27 BSC		0.05 BSC	
L	0.05	0.25	0.0020	0.0098
L1	0.38	0.50	0.0150	0.0197
L2	0.38	0.50	0.0150	0.0197
H	3.30	3.50	0.1299	0.1378
I	/	0.18	/	0.0070