

General Description

The MY3401 is the high cell density trench P-CH MOSFET, which provide excellent $R_{DS(ON)}$ and efficiency for most of the small power switching and load switch applications.




Features

V_{DSS}	-20	V
I_D	-2.5	A
$R_{DS(ON)}$ (at $V_{GS} = -10V$)	90	$m\Omega$
$R_{DS(ON)}$ (at $V_{GS} = -4.5V$)	115	$m\Omega$

Application

- Green Device Available
- Super Low Gate Charge
- Excellent CdV/dt effect decline

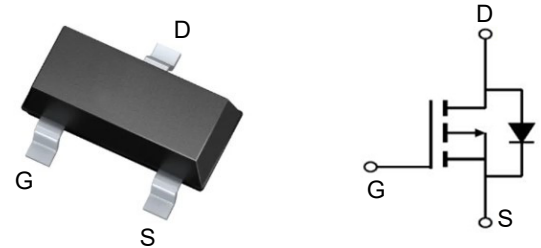

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
MY3401	SOT-23	A19T	3000

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V _{DS}	-20	V
Gate-Source Voltage		V _{GS}	±10	V
Drain Current ^a	T _C =25°C	I _D	-2.5	A
	T _C =25°C, t ≤ 5s		-2.8	
	T _C =70°C		-1.1	
Drain Current –Pulsed ^a		I _{DM}	-8.0	A
Power Dissipation (T _C =25°C)		P _D	1.56	W
Power Dissipation – Derate Above 25°C			0.012	W/°C
Storage Temperature Range		T _{STG}	-55 ~ +150	°C
Operating Junction Temperature Range		T _J	-55 ~ +150	°C
Thermal Resistance, Junction-to-Ambient ¹		R _{θJA}	100	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)



Parameter		Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics							
Drain-Source Breakdown Voltage		BV _{DSS}	V _{GS} =0V, I _D =-250μA	-20	---	---	V
Zero Gate Voltage Drain Current	T _J =25°C	I _{DSS}	V _{DS} =-16V, V _{GS} =0V	---	---	-1	μA
Gate-Body Leakage		I _{GSS}	V _{GS} =±10V, V _{DS} =0V	---	---	±100	nA
On Characteristics ^a							
Gate Threshold Voltage		V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-0.3	---	-1.0	V
Drain-Source On-State Resistance		R _{DS(on)}	V _{GS} =-4.5V, I _D =-2.0A	---	90	125	mΩ
			V _{GS} =-2.5V, I _D =-1.5A	---	115	165	
			V _{GS} =-1.8V, I _D =-1.0A	---	170	250	
Forward Transconductance		g _{fs}	V _{DS} =5V, I _D =1A				S
Drain-Source Diode Characteristics ^a							
Continuous Source Current		I _S	V _G =V _D =0V, Force Current	---	---	-2.0	A
Diode Forward Voltage		V _{SD}	V _{GS} =0V, I _S =-1A	---	---	-1.3	V
Dynamic Characteristics ^b							
Input Capacitance		C _{iss}	V _{DS} =-15V, V _{GS} =0V, F=1MHz	---			pF
Output Capacitance		C _{oss}		---			
Reverse Transfer Capacitance		C _{rss}		---			
Switching Characteristics ^b							
Total Gate Charge		Q _g	V _{DS} =-10V, V _{GS} =-4.5V, I _D =-2A	---			nC
Gate-Source Charge		Q _{gs}		---			
Gate-Drain Charge		Q _{gd}		---			
Turn-On Delay Time		T _{d(on)}	V _{DD} =-10V, V _{GS} =-4.5V, R _G =25Ω, I _D =-1A	---			ns
Rise Time		T _r		---			
Turn-Off Delay Time		T _{d(off)}		---			
Fall Time		T _f		---			

Notes: a. Repetitive Rating: Pulsed width limited by maximum junction temperature.

b. Pulse test: pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

c. Guaranteed by design, not subject to production testing.

Switching Time Test Circuit and Waveforms

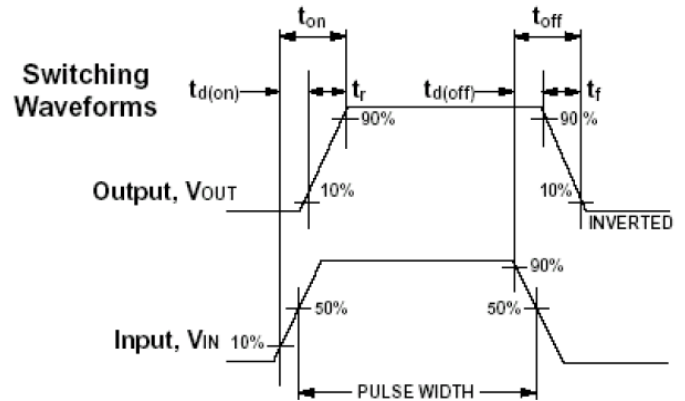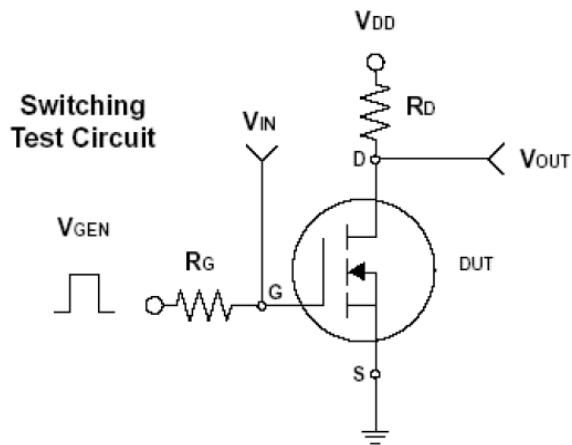

Soldering Methods For Products

1. Storage environment : Temperature=10°C~35°C, Humidity=65%±15%
2. Reflow soldering of surface mount devices

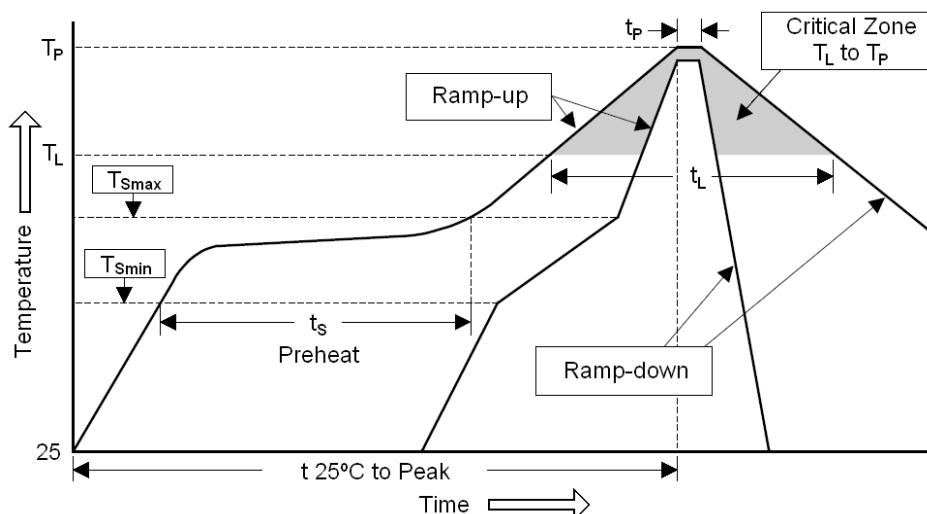


Figure : Temperature Profile

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	< 3°C/sec	< 3°C/sec
Preheat		
- Temperature Min (T_{Smin})	100°C	100°C
- Temperature Max (T_{Smax})	150°C	200°C
- Time (Min to Max) (t_s)	60 ~ 120 sec	60 ~ 180 sec
T_{Smax} to T_L		
- Ramp-up rate	< 3°C/sec	< 3°C/sec
Time maintained above:		
- Temperature (T_L)	183°C	217°C
- Time (t_L)	60 ~ 150 sec	60 ~ 150 sec
Peak Temperature (T_P)	240°C +0/-5°C	260°C +0/-5°C
Time within 5°C of actual Peak Temperature (t_P)	10 ~ 30 sec	20 ~ 40 sec
Ramp-down rate	< 6°C/sec	< 6°C/sec
Time 25°C to Peak Temperature	< 6 minutes	< 8 minutes


3. Flow (wave) soldering (solder dipping)

Product	Peak Temperature	Dipping Time
Pb devices	245°C ±5°C	5sec ±1sec
Pb-Free devices	260°C +0/-5°C	5sec ±1sec

Notices:

- All companies, brands, logos, pictures, product names and trademarks are the property of owner respective companies.
- 规格书内容、版本或参数规格如有更改恕不另行通知，如有特定规格的需求请事先告知，如因此而造成任何的问题，供应商不承担任何赔偿和法律责任。
- MOS 管电路是静电敏感元器件，且对生产环境要求较严，建议在存放、运输及生产操作时一定要避免静电干扰。
- 由于每个 PCB 版图和设计都不同，每个 MOSFET 的结构也不同，因此，没有通用的流程可用来计算每个应用的最大允许电流，建议在选用 MOS 管器件时考虑到余量，以免 MOS 管因此而造成损坏。

Package Mechanical Data-SOT-23

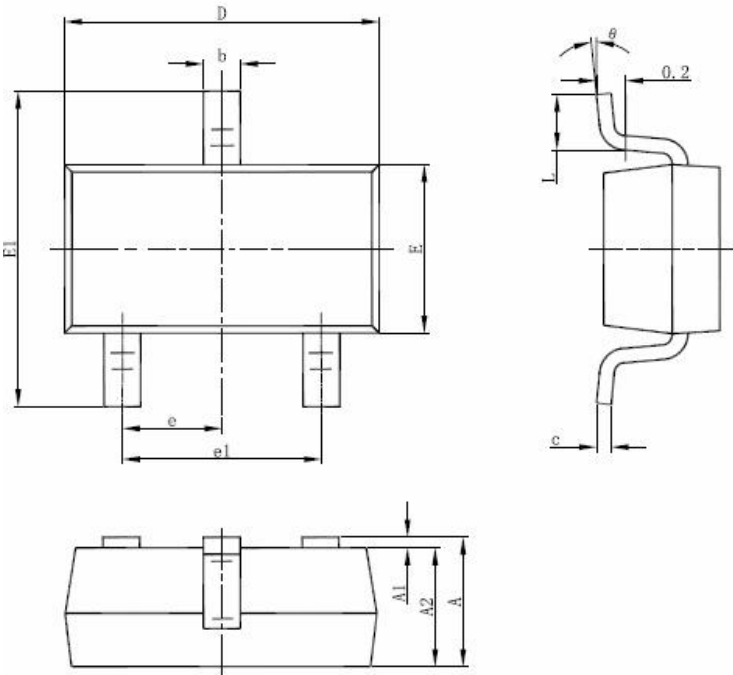

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°